



# SUNSPACE

## WASHING WEATHERMASTER® WINDOWS



**1** Fully deploy windows in the closed position.




**2** Stack all V4T windows to middle, roughly stomach height.



**3** Slide 1 panel at a time slightly downward to allow for grasping with the hands top and bottom.




**4** Firmly pull vent to the left to compress the tension springs on each panel.

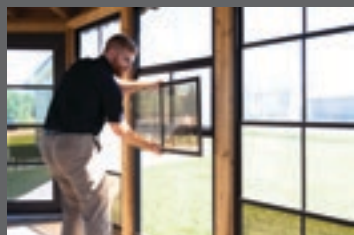

**5** Ease the right side out of the right track so that it is clear of the frames.



**6** Pull gently the panel to the right so that the entire panel is clear of all window framing and set it aside leaning against a wall or chair.

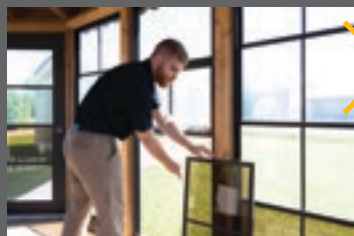


**7** Repeat for all vents in each window.

### MOVE ON TO CLEANING STEP 8






## IMPORTANT- CLEANING & CARING FOR V4T WEATHERMASTER® VINYL WINDOWS

WeatherMaster® Vinyl Products should be cleaned at least every 6 months. Sunspace Vinyl cleaner is recommended to maintain the vinyl and prolong it's life. The use of other products containing abrasives, ammonia or other chemicals can damage vinyl and will void warranty.




**8** With vents removed, take each one and spray both sides with either Sunspace vinyl cleaner or a cleaning solution that is free of ammonia and acids. Always use 1 microfiber cloth for cleaning and another dry microfiber cloth for drying. Do not apply heavy pressure or rub hard on the vinyl.

If vinyl or frames have a buildup of dirt or mud caked on, using a microfiber cloth, soak cloth in warm water and soak the dirt to soften and loosen. Once softened, wipe gently with microfiber cloth soaked in clean warm water to remove all debris. Never press or rub hard. Once heavy soiling is removed, go back to step 8 and clean the panels.



**9** Reverse the process to re-install after cleaning. Start with panel into the outside track, then working last to inside track.



BRING THE OUTSIDE IN  
[SUNSPACESUNROOMS.COM](http://SUNSPACESUNROOMS.COM)




# SUNSPACE


## WASHING WEATHERMASTER® WINDOWS



**1** Fully deploy windows in the closed position.

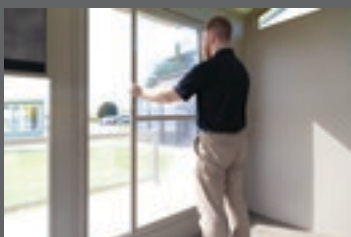


**2** Stack all H4T-H2T to the middle.

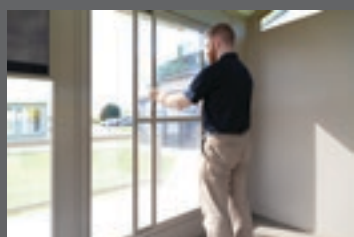

**3** Slide 1 panel at a time slight to the right to allow for grasping with a hand on each side.




**4** Lift one panel at a time upward.

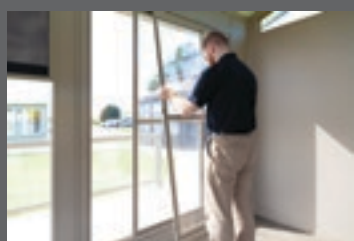

**5** Ease the bottom of the panel inwards, over the tracks and then sit it on the floor.



**6** Move the removed panel to the side and set against the wall.


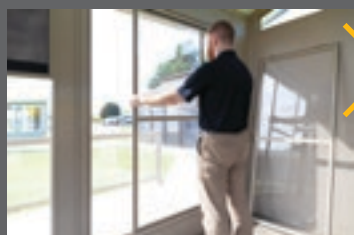


**7** Repeat for all vents in each windows

**MOVE ON TO  
CLEANING STEP 8**




## IMPORTANT- CLEANING & CARING FOR H2T-H4T WEATHERMASTER® VINYL WINDOWS

WeatherMaster® Vinyl Products should be cleaned at least every 6 months. Sunspace Vinyl cleaner is recommended to maintain the vinyl and prolong it's life. The use of other products containing abrasives, ammonia or other chemicals can damage vinyl and will void warranty.



**8** With vents removed, take each one and spray both sides with either Sunspace vinyl cleaner or a cleaning solution that is free of ammonia and acids. Always use 1 microfiber cloth for cleaning and another dry microfiber cloth for drying. Do not apply heavy pressure or rub hard on the vinyl.

If vinyl or frames have a buildup of dirt or mud caked on, using a microfiber cloth, soak cloth in warm water and soak the dirt to soften and loosen. Once softened, wipe gently with microfiber cloth soaked in clean warm water to remove all debris. Never press or rub hard. Once heavy soiling is removed, go back to step 8 and clean the panels.



**9** Reverse the process to re-install after cleaning. Start with panel into the outside track, then working last to inside track.



**BRING THE OUTSIDE IN**  
[SUNSPACESUNROOMS.COM](http://SUNSPACESUNROOMS.COM)